



International Journal of Management, IT & Engineering

(ISSN: 2249-0558)

CONTENTS

| Sr. No. | TITLE & NAME OF THE AUTHOR (S) | Page No. |
|-----------|---|----------------|
| <u>1</u> | Empirical and Qualitative Studies by Analyzing Requirement Issues In Global Software Development (GSD). Rabia Sultana, Fahad Jan, Ahmad Mateen and Ahmad Adnan | <u>1-18</u> |
| <u>2</u> | Challenges and Opportunities of Technology Transfer Management. Armin Mahmoudi | <u>19-34</u> |
| <u>3</u> | SMEs Competitive Advantage through Supply Chain Management Practices. Prof. Gyaneshwar Singh Kushwaha | <u>35-50</u> |
| <u>4</u> | Different Issue for Handling Different Cache Strategies on Usenet. Harish Rohil and Jitender Yadav | <u>51-71</u> |
| <u>5</u> | Power Quality enhancement in MICROGRID (Islanding Mode) by Using ND - MLI DSTATCOM. M. Manigandan, MIEEE and Dr. B. Basavaraja, SMIEEE | <u>72-90</u> |
| <u>6</u> | Analysis of Optical Soliton Propagation in Birefringent Fibers. R. Samba Siva Nayak, Suman. J and Naveen | <u>91-102</u> |
| <u>7</u> | Human Resource Accounting in IT industry (A study with reference to Infosys Technologies Limited). Dr. P. Natarajan and Bashar Nawaz | <u>103-123</u> |
| <u>8</u> | Solving profit based unit commitment problem using single unit dynamic programming. P.V. Rama Krishna and Dr. Sukhdeo sao | <u>124-146</u> |
| <u>9</u> | Achieving Optimal DoS Resistant P2P Topologies for Live Multimedia Streaming using Cost function Algorithm. A. L.Srinivasulu, S. Jaya Bhaskar, Ms. K. Deepthi and Dr. Sudarson Jena | <u>147-162</u> |
| <u>10</u> | Quality of Web Sites – A Study On Some Standard Indian Universities. K. V. N. Prasad and Dr. A. A. Chari | <u>163-182</u> |
| <u>11</u> | Simulating Complex Environmental Phenomena Using Cubemap Mapping Technique. Movva. N.V. Kiran Babu, Ch. Siva Rama Krishna, M. Hanumantha Rao and V. Venu Gopal | <u>183-203</u> |
| <u>12</u> | Data Sharing and Querying in Peer-to-Peer Data management System. Jyoti Duhan | <u>204-223</u> |
| <u>13</u> | Secure File Transmission Scheme Based on Hybrid Encryption Technique. Gaurav Shrivastava | <u>224-238</u> |
| <u>14</u> | Investigating Flip-Flop Gates Using Interactive Technology. Mr. Amish Patel, Ms. Neha P. Chinagi and Mr. Hiren R.Raotole | <u>239-255</u> |
| <u>15</u> | B2B Versus B2C Direct Selling. Ankit Chadha and Er. Banita Chadha | <u>256-270</u> |
| <u>16</u> | Application And Implementation of Crm In Hotels of Developing Cities - A Case Study of Ranchi. Praveen Srivastava, Abhinav Kumar Shandilya and Shelly Srivastava | <u>271-294</u> |
| <u>17</u> | An Automatic Bacterial Colony Counter. Ms. Hemlata, Mr. Ashish Oberoi and Mr. Sumit Kaushik | <u>295-309</u> |

Chief Patron

Dr. JOSE G. VARGAS-HERNANDEZ

Member of the National System of Researchers, Mexico

Research professor at University Center of Economic and Managerial Sciences,
University of Guadalajara

Director of Mass Media at Ayuntamiento de Cd. Guzman

Ex. director of Centro de Capacitacion y Adiestramiento

Patron

Dr. Mohammad Reza Noruzi

PhD: Public Administration, Public Sector Policy Making Management,
Tarbiat Modarres University, Tehran, Iran

Faculty of Economics and Management, Tarbiat Modarres University, Tehran, Iran

Young Researchers' Club Member, Islamic Azad University, Bonab, Iran

Chief Advisors

Dr. NAGENDRA. S.

Senior Asst. Professor,

Department of MBA, Mangalore Institute of Technology and Engineering, Moodabidri

Dr. SUNIL KUMAR MISHRA

Associate Professor,

Dronacharya College of Engineering, Gurgaon, INDIA

Mr. GARRY TAN WEI HAN

Lecturer and Chairperson (Centre for Business and Management),

Department of Marketing, University Tunku Abdul Rahman, MALAYSIA

MS. R. KAVITHA

Assistant Professor,

Aloysius Institute of Management and Information, Mangalore, INDIA

Dr. A. JUSTIN DIRAVIAM

Assistant Professor,

Dept. of Computer Science and Engineering, Sardar Raja College of Engineering,

Alangulam Tirunelveli, TAMIL NADU, INDIA

Editorial Board

Dr. CRAIG E. REESE

Professor, School of Business, St. Thomas University, Miami Gardens

Dr. S. N. TAKALIKAR

Principal, St. Johns Institute of Engineering, PALGHAR (M.S.)

Dr. RAMPRATAP SINGH

Professor, Bangalore Institute of International Management, KARNATAKA

Dr. P. MALYADRI

Principal, Government Degree College, Osmania University, TANDUR

Dr. Y. LOKESWARA CHOUDARY

Asst. Professor Cum, SRM B-School, SRM University, CHENNAI

Prof. Dr. TEKI SURAYYA

Professor, Adikavi Nannaya University, ANDHRA PRADESH, INDIA

Dr. T. DULABABU

Principal, The Oxford College of Business Management, BANGALORE

Dr. A. ARUL LAWRENCE SELVAKUMAR

Professor, Adhiparasakthi Engineering College, MELMARAVATHUR, TN

Dr. S. D. SURYAWANSHI

Lecturer, College of Engineering Pune, SHIVAJINAGAR

Dr. S. KALIYAMOORTHY

Professor & Director, Alagappa Institute of Management, KARAIKUDI

Prof S. R. BADRINARAYAN

Sinhgad Institute for Management & Computer Applications, PUNE

Mr. GURSEL ILIPINAR

ESADE Business School, Department of Marketing, SPAIN

Mr. ZEESHAN AHMED

Software Research Eng, Department of Bioinformatics, GERMANY

Mr. SANJAY ASATI

Dept of ME, M. Patel Institute of Engg. & Tech., GONDIA(M.S.)

Mr. G. Y. KUDALE

N.M.D. College of Management and Research, GONDIA(M.S.)

Editorial Advisory Board

Dr. MANJIT DAS

Assistant Professor, Deptt. of Economics, M.C.College, ASSAM

Dr. ROLI PRADHAN

Maulana Azad National Institute of Technology, BHOPAL

Dr. N. KAVITHA

Assistant Professor, Department of Management, Mekelle University, ETHIOPIA

Prof C. M. MARAN

Assistant Professor (Senior), VIT Business School, TAMIL NADU

Dr. RAJIV KHOSLA

Associate Professor and Head, Chandigarh Business School, MOHALI

Dr. S. K. SINGH

Asst. Professor, R. D. Foundation Group of Institutions, MODINAGAR

Dr. (Mrs.) MANISHA N. PALIWAL

Associate Professor, Sinhgad Institute of Management, PUNE

Dr. (Mrs.) ARCHANA ARJUN GHATULE

Director, SPSPM, SKN Sinhgad Business School, MAHARASHTRA

Dr. NEELAM RANI DHANDA

Associate Professor, Department of Commerce, kuk, HARYANA

Dr. FARAH NAAZ GAURI

Associate Professor, Department of Commerce, Dr. Babasaheb Ambedkar Marathwada University, AURANGABAD

Prof. Dr. BADAR ALAM IQBAL

Associate Professor, Department of Commerce, Aligarh Muslim University, UP

Dr. CH. JAYASANKARAPRASAD

Assistant Professor, Dept. of Business Management, Krishna University, A. P., INDIA

Technical Advisors

Mr. Vishal Verma

Lecturer, Department of Computer Science, Ambala, INDIA

Mr. Ankit Jain

Department of Chemical Engineering, NIT Karnataka, Mangalore, INDIA

Associate Editors

Dr. SANJAY J. BHAYANI

Associate Professor, Department of Business Management, RAJKOT, INDIA

MOID UDDIN AHMAD

Assistant Professor, Jaipuria Institute of Management, NOIDA

Dr. SUNEEL ARORA

Assistant Professor, G D Goenka World Institute, Lancaster University, NEW DELHI

Mr. P. PRABHU

Assistant Professor, Alagappa University, KARAIKUDI

Mr. MANISH KUMAR

Assistant Professor, DBIT, Deptt. Of MBA, DEHRADUN

Mrs. BABITA VERMA

Assistant Professor, Bhilai Institute Of Technology, DURG

Ms. MONIKA BHATNAGAR

Assistant Professor, Technocrat Institute of Technology, BHOPAL

Ms. SUPRIYA RAHEJA

Assistant Professor, CSE Department of ITM University, GURGAON

Title

**ANALYSIS OF OPTICAL SOLITON PROPAGATION IN
BIREFRINGENT FIBERS**

Author(s)

**R. SAMBA SIVA
NAYAK**

HOD,

Department of ECE,

Don Bosco Institute of Tech

& Science

SUMAN. J

Asst. professor,

Department of ECE,

Don Bosco Institute of Tech

& Science

NAVEEN

EEECE,

Department of ECE,

Don Bosco Institute of Tech

& Science

Abstract:

In this paper, the effects of polarization-mode dispersion and third-order dispersion on soliton pulse propagation and also studied effective pulse dynamics in single mode fiber. In this paper we are discussing about optical pulse propagation inside single mode fiber, polarization mode dispersion is discussed, effects of third-order dispersion and birefringence on solitons propagation and methods for solving coupled nonlinear Schrodinger equations.

Keywords: Nonlinear Schrodinger- NLS, optical pulse propagation inside single mode fiber, OSP- optical soliton propagation

I. Introduction:

The evolution of optical communications revolutionized the speeds of data transmission in communication networks. The enormous bandwidth available at carrier frequencies of THz range increased rate of information greatly and backbone networks at 2.5 Gbps became a reality. The growing demand for faster information transfer and also the increased demand for information itself has necessitated that speeds beyond 2.5 Gbps be achieved. We know that information as electrical signals are sent in the form of pulses and the amount of information that can be transmitted is limited by the pulse width, lesser the pulse width, higher the bit rate and greater the rate of information transmission. But as we transmit electrical pulses in fibers due to material dispersion the pulses spread and overlap. This results in loss of information. The spreading relative to the initial pulse width is more if the pulse has very small width than if it has larger width. So if we try to send more information by lessening the pulse width and hence increasing the bit rate, we would have to encounter dispersion and it may be so harmful that large amounts of information loss can happen. To prevent loss of information generally error control coding techniques are used but these only decrease the amount of actual information transferred in the sent bits in a given time. Another way is suitable line coding, so that information can be obtained despite dispersion. One more solution is Dispersion compensation i.e. to counter the spreading of the pulse by introducing a dispersion of the opposite kind that reduces the pulse widths so that the two effects nullify and there is no net change in the pulses transmitted. But

then many other phenomena like non linearity in fiber, polarization mode dispersion etc become prominent.

Solitons have been proposed and implemented successfully as the solution to the problem of increasing the bit rate higher. Using solutions, bit rates as high as 40 Gbps have been achieved. So what are solutions? Why are they solutions to the problem of increasing bit rate? What are the limitations in implementing soliton based communication systems? How are they overcome? My project has been step towards answering these questions.

II. Optical pulse propagation inside single mode fiber:

We obtained the nonlinear Schrodinger (NLS) equation that governs propagation of optical pulses inside single-mode fibers. For pulse widths >5 ps, one can use equation given by

$$i \frac{\partial A}{\partial z} = -\frac{i\alpha}{2} A + \frac{\beta_2}{2} \frac{\partial^2 A}{\partial t^2} - \gamma |A|^2 A$$

Where A is the slowly varying amplitude of the pulse envelope and T is measured in a frame of reference moving with the pulse at the group velocity V_g . The three terms on the right-hand side of Eq govern, respectively, the effects of fiber losses, dispersion, and nonlinearity on pulses propagating inside optical fibers. Depending on the initial width T_0 and the peak power P_0 of the incident pulse, either dispersive or nonlinear effects may dominate along the fiber. It is useful to introduce two length scales, known as the dispersion length L_D and the nonlinear length L_{NL} . Depending on the relative magnitudes of L_D , L_{NL} and the fiber length L pulses can evolve quite differently.

Let us introduce a time scale normalized to the input pulse width T_0 as

$$\tau = \frac{T}{T_0} = \frac{t - z/V_g}{T_0}$$

At the same time we introduce a normalized amplitude U as

$$A(z, \tau) = \sqrt{P_0} \exp(-\alpha z / 2) U(z, \tau)$$

Where P_0 is the peak power of the incident pulse. The exponential factor in Eq accounts for fiber losses. $U(z, \tau)$ is found to satisfy

$$i \frac{\partial U}{\partial z} = \frac{\text{sgn}(\beta_2)}{2L_D} \frac{\partial^2 U}{\partial \tau^2} - \frac{\exp(-\alpha z)}{L_{NL}} |U|^2 U$$

Where $\text{sgn}(\beta_2) = \pm 1$ depending on the sign of the GVD parameter β_2 and $L_D = \frac{T_0^2}{\beta_2}$,

$$L_{NL} = \frac{1}{P_0 \gamma}$$

The dispersion length L_D and the nonlinear length L_{NL} provide the length scales over which dispersive or nonlinear effects become important for pulse evolution. Depending on the relative magnitudes of L , L_D and L_{NL} , the propagation behavior can be classified in the following four categories.

When fiber length L is such that $L \ll L_{NL}$ and $L \ll L_D$, neither dispersive nor nonlinear effects play a significant role during pulse propagation. This can be seen by noting that both terms on the right-hand side of Eq can be neglected in that case. i.e., the pulse maintains its shape during propagation. The fiber plays a passive role in this regime and acts as a mere transporter of optical pulses (except for reducing the pulse energy because of fiber losses). This regime is useful for optical communication systems. For $L \approx 50$ km, L_D and L_{NL} should be larger than 500 km for distortion-free transmission. One can estimate T_0 and P_0 from Eq for given values of the fiber parameters β_2 and γ . At $\lambda = 1.55 \mu\text{m}$ $|\beta_2| = 20 \text{ ps}^2/\text{km}$, and $\gamma = 3 \text{ W}^{-1}\text{km}^{-1}$ for standard telecommunication fibers. The use of these values in Eq shows that the dispersive and nonlinear effects are negligible for $L < 50$ km if $T_0 > 100$ ps and $P_0 = 1$ mW. However, L_D and L_{NL} become smaller as pulses become shorter and more intense. For example, L_D and L_{NL} are ≈ 100 m for $T_0 \approx 1$ ps and $P_0 \approx 1$ W. For such optical pulses, both the dispersive and nonlinear effects need to be included if fiber length exceeds a few meters.

When the fiber length is such that $L \ll L_{NL}$ but $L \approx L_D$, the last term in Eq is negligible compared to other two. The pulse evolution is then governed by GVD, and the nonlinear effects play relatively minor role. The effect of GVD on propagation of optical pulses is discussed in this chapter. The dispersion-dominant regime is applicable whenever the fiber and pulse parameters are such that

$$\frac{L_D}{L_{NL}} = \frac{\gamma P_0 T_0^2}{|\beta_2|} \ll 1$$

When the fiber length L is such that $L \ll L_D$ but $L \approx L_{NL}$, the dispersion term in Eq. is negligible compared to the nonlinear term. In that case, pulse evolution in the fiber is governed by SPM that leads to spectral broadening of the pulse. The nonlinearity-dominant regime is applicable whenever

$$\frac{L_D}{L_{NL}} = \frac{\gamma P_0 T_0^2}{|\beta_2|} \gg 1$$

This condition is readily satisfied for relatively wide pulses ($T_0 > 100$ ps) with a peak power $P_0 \approx 1$ W. Note that SPM can lead to pulse shaping in the presence of weak GVD effects. If the pulse develops a sharp leading or trailing edge, the dispersion term may become important even when Eq is initially satisfied.

When the fiber length L is longer or comparable to both L_D and L_{NL} , dispersion and nonlinearity act together as the pulse propagates along the fiber. The interplay of the GVD and SPM effects can lead to a qualitatively different behavior compared with that expected from GVD or SPM alone. In the anomalous-dispersion regime ($\beta_2 < 0$), the fiber can support solutions. In the normal-dispersion regime ($\beta_2 > 0$), the GVD and SPM effects can be used for pulse compression. Eq is extremely helpful in understanding pulse evolution in optical fibers when both dispersive and nonlinear effects should be taken into account.

III. Split-step Fourier method:

We split the computation of A over distance L_c into 4 steps:

Step1. Nonlinear step: Compute $A_1 = \exp(L_c N)A(Z, T)$ (by finite differences);

Step2. Forward FT: Perform the forward FFT on A_1 : $A_2 = F A_1$;

Step3. Linear step: Compute $A_3 = \exp(L_c L) A_2$;

Step4. Backward FT: Perform the backward FFT on A_3 : $A(Z + L_c, T) = F^{-1} A_3$;

After step 4 we will get the soliton pulse amplitude after traveling length L_c . hence to find the soliton amplitude after traveling long distance we have to repeat the above algorithm for many number of iterations.

IV. Results:

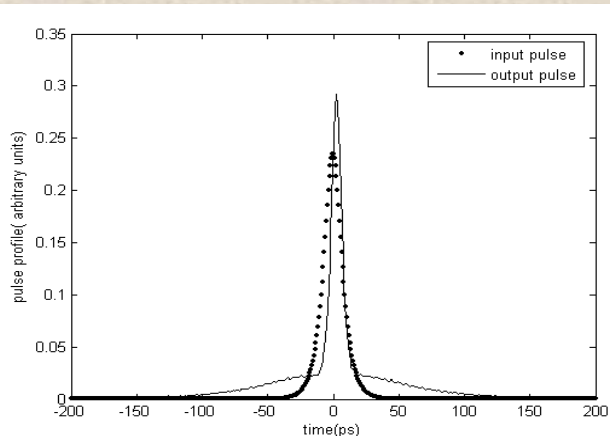


Fig.1 pulse profile in nonlinear regime with $n_2=9/2$, $\alpha_2=2/3$ and $d_0=4$

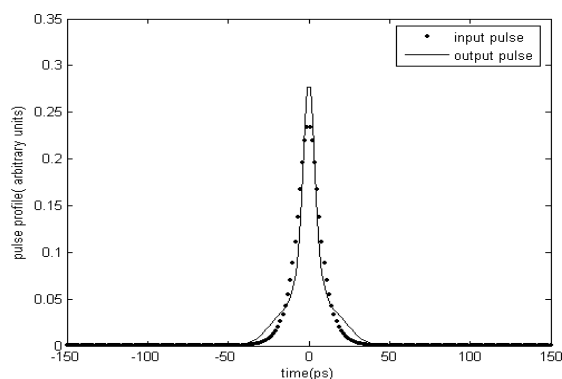


Fig.2 Pulse profile in nonlinear regime with $n_2=9/8$, $\alpha_2=2/3$ and $d_0=1$

The evolution of a pulse along the fiber is simulated by use of the split-step fast-Fourier-transform algorithm operating on Eq. In this algorithm the fiber is subdivided into small sections in which the dispersion and the nonlinearity can be taken into account separately, in the frequency and the time domains respectively. The length of the Fast-Fourier-Transform vector used for our calculations is 2048. To deal with edge effects, we enlarge the computational region, by a factor of 2 or 4 to $Z=(-80,80)$ or $Z=(-160,160)$. As one may expect, the relative magnitude of k_2 and k_3 depends on the deviation of the optical wavelength λ_0 from zero-dispersion wavelength λ_D , the smaller λ_0 deviates from λ_D , the larger k_3 is. For 5-psec pulse we can obtain $\Gamma=0.0105$, which corresponds to a loss of 0.2 dB/km.

V. Conclusions:

We have examined the behavior of optical pulses in birefringent single mode optical fiber near the zero-dispersion wavelength. When the pulses propagate at the zero-dispersion

wavelength the third-order dispersion plays a crucial role and its effects must be carefully investigated. We have shown that effects of the third-order dispersion on the soliton propagation. The third-order dispersion has different effects on the two polarizations. The solitons produced and their subsequent evolutions depend on energy of the launched pulse and the fiber parameters. It is found that the third-order dispersion in the fibers is strong enough to cause the pulse distortion.

References:

- C. R. Menyuk, "Nonlinear pulse propagation in birefringent optical fibers," *IEEE J. Quantum Electron.*, vol. QE-23, pp. 174–176, 1987.
- D. Marcuse, C. R. Menyuk, and P. K. Wai, "Application of the Manakov- PMD equation to studies of signal propagation in optical fibers with randomly varying birefringence," *J. Light wave Technol.* vol. 15, pp. 1735–1746, Sept. 1997.
- I. Nishioka, T. Hirooka, and A. Hasegawa, "Effect of map strength on polarization mode dispersion in dispersion-managed soliton systems," *IEEE Photon. Technol. Lett.*, vol. 12, pp. 1480–1482, Nov. 2000.